
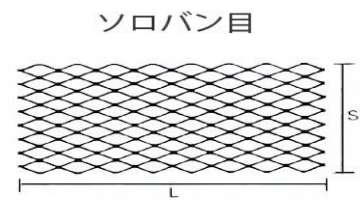



【ご注意】 本表を使用することで生じたいかなる損害に対して、弊社は一切の責任を負わないことを予めご了承下さい。

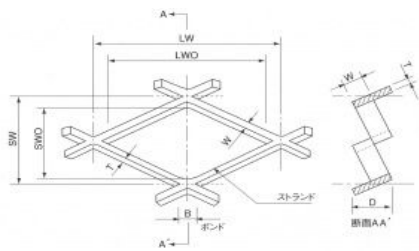

エキスパンﾄﾞメタル	メッシュ(mm)		ストランド(mm)		kg/m ²	定尺寸法 L×S(mm)/質量(kg/枚)		
	SW	LW	T	W		914(L)×1829(S)	1219(L)×2438(S)	1524(L)×3048(S)
XG-11	34	135.4	4.5	7.0	14.5	24.2	43.1	67.4
XG-12	34	135.4	6.0	7.0	19.4	32.4	57.7	90.1
XG-13	34	135.4	6.0	9.0	24.9	41.6	74.0	116
XG-14	34	135.4	8.0	9.0	33.2	55.5	98.7	154
XG-21	36	101.6	4.5	7.0	13.7	22.9	40.7	63.6
XG-22	36	101.6	6.0	7.0	18.3	30.6	54.4	85.0
XG-23	36	101.6	6.0	9.0	23.6	39.5	70.1	110
XG-24	36	101.6	8.0	9.0	31.4	52.5	93.3	146

エキスパンﾄﾞメタル	メッシュ(mm)		ストランド(mm)		kg/m ²	定尺寸法 L×S(mm)/質量(kg/枚)		
	SW	LW	T	W		1829(L)×914(S)	2438(L)×1219(S)	3048(L)×1524(S)
XS-31	12	30.5	1.2	1.5	2.36	3.95	7.01	
XS-32	12	30.5	1.6	2.0	4.19	7.01	12.5	19.5
XS-33	12	30.5	2.3	3.0	9.03	15.1	26.8	41.9
XS-41	22	50.8	1.6	2.0	2.28	3.81	6.78	10.6
XS-42	22	50.8	2.3	2.5	4.10	6.86	12.2	19.0
XS-43	22	50.8	3.2	3.5	8.00	13.4	23.8	37.2
XS-51	25	61.0	1.6	2.5	2.51	4.20	7.46	11.7
XS-52	25	61.0	2.3	3.0	4.33	7.24	12.9	20.1
XS-53	25	61.0	3.2	4.0	8.05	13.5	23.9	37.4
XS-61	34	76.2	2.3	3.0	3.19	5.33	9.48	14.8
XS-62	34	76.2	3.2	4.0	5.91	9.88	17.6	27.5
XS-63	34	76.2	4.5	5.0	10.4	17.4	30.9	48.3

エキスパンﾄﾞメタル	メッシュ(mm)		ストランド(mm)		kg/m ²	定尺寸法 L×S(mm)/質量(kg/枚)		
	SW	LW	T	W		914(L)×1829(S)	1219(L)×2438(S)	1524(L)×3048(S)
XS-71	50	152.4	2.3	3.5	2.53	4.23	7.52	11.8
XS-72	50	152.4	3.2	4.0	4.02	6.72	11.9	18.7
XS-73	50	152.4	4.5	5.0	7.06	11.8	21.0	32.8
XS-81	75	203.2	3.2	4.0	2.68	4.48	7.96	12.4
XS-82	75	203.2	4.5	5.0	4.71	7.88	14.0	21.9
XS-83	75	203.2	6.0	6.0	7.54	12.6	22.4	35.0